


**LANZA DE ESPUMA PORTÁTIL**  
PORTABLE FOAM BRANCHPIPE

Mod. **SE-LBK**

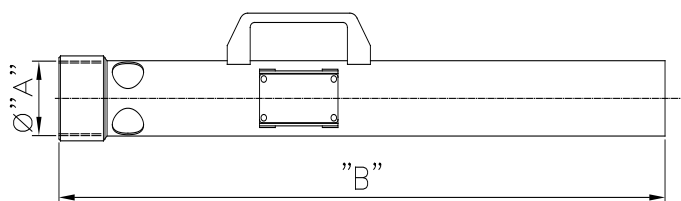

**CARACTERÍSTICAS CONSTRUCTIVAS**

- Material tubo: acero inox AISI 316.
- Material lanza: acero inox AISI 316.
- Asa: Fibra reforzada con poliamida autoextinguible.

**OPCIONAL**

- Conexiones racor: BCN-45, BCN-70, DIN-45, DIN-70, STORZ, BSS, NH.

**CONSTRUCTION FEATURES**

- Pipe material: stainless steel AISI 316.
- Nozzle material: stainless steel AISI 316.
- Handle material: Glass-fiber reinforced polyamide based - self-extinguish.

**OPTIONAL**

- Connection types: BCN-45, BCN-70, DIN-45, DIN-70, STORZ, BSS, NH.

MODELO MODEL	CAUDAL FLOW RATE l/min. @5bar	PRESIÓN DE TRABAJO RECOMENDADA WORKING PRESSURE ADVISED Bar	ALCANCE THROW m@5 bar	"ØA" GAS - BSP	"B" mm.	PESO WEIGHT Kg
SE-LBK-2	225	de 3 a 7 bar - from 3 to 7 bar	20	2" - M	800	2,3
SE-LBK-4	450	de 3 a 7 bar - from 3 to 7 bar	24	2 1/2" - F	800	2,3
SE-LBK-6	600	de 3 a 7 bar - from 3 to 7 bar	25	2 1/2" - F	900	3,3
SE-LBK-8	800	de 3 a 7 bar - from 3 to 7 bar	28	2 1/2" - F	900	3,3

Relación de expansión: 1:10 a 5 bar  
(Dependiendo del tipo de espumógeno)

Expansion ratio: 1:10 at 5 bar  
Depending on foam concentrate type.