


LANZA DE ESPUMA PORTÁTIL

PORTABLE FOAM BRANCHPIPE

Mod. **SE-LBK**

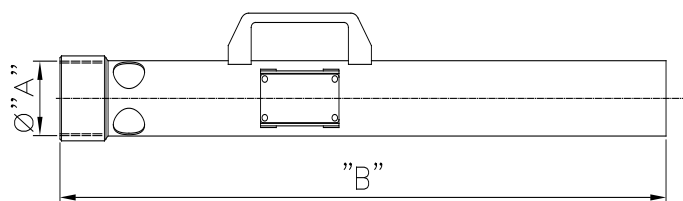

CARACTÉRISTIQUES CONSTRUCTIVES

- Matériau du tube: acier inox AISI 316.
- Matériau de la buse: acier inox AISI 316.
- Poignée: Fibre renforcée avec polyamide autoextinguible.

OPTION

- Raccords de Connection: BCN-45, BCN-70, DIN-45, DIN-70, STORZ, BSS, NH.

CONSTRUCTION FEATURES

- Pipe material: stainless steel AISI 316
- Nozzle material: stainless steel AISI 316.
- Handle material: Glass-fiber reinforced polyamide based - self-extinguish

OPTIONAL

- Connection types: BCN-45, BCN-70, DIN-45, DIN-70, STORZ, BSS, NH.

MODELO MODEL	CAUDAL FLOW RATE l/min. @5bar	PRESIÓN DE TRABAJO RECOMENDADA WORKING PRESSURE ADVISED Bar	ALCANCE THROW m@5 bar	"ØA" GAS - BSP	"B" mm.	PESO WEIGHT Kg
SE-LBK-2	225	de 3 a 7 bar - from 3 to 7 bar	20	2" - M	800	2,3
SE-LBK-4	450	de 3 a 7 bar - from 3 to 7 bar	24	2 1/2" - F	800	2,3
SE-LBK-6	600	de 3 a 7 bar - from 3 to 7 bar	25	2 1/2" - F	900	3,3
SE-LBK-8	800	de 3 a 7 bar - from 3 to 7 bar	28	2 1/2" - F	900	3,3

Foisonnement: 1 : 10 a 5 bar
(Selon le type d'émulseur)

Expansion ratio: 1:10 at 5 bar
Depending on foam concentrate type.